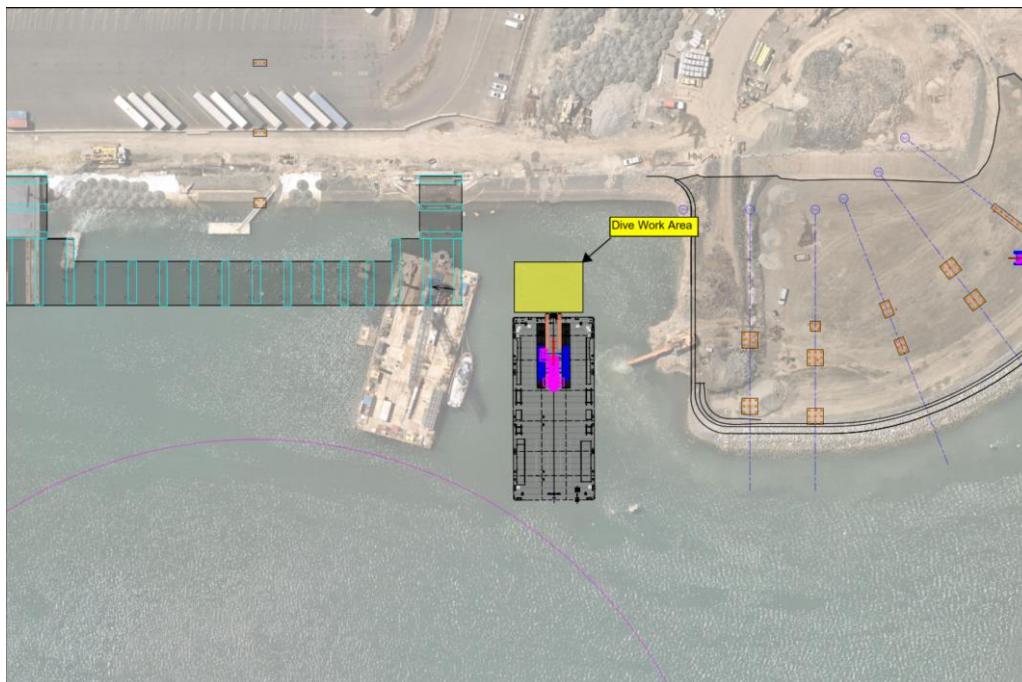

Title:	Berth T3 East (HBJV Construction Zone)
Port:	Devonport
Description:	(TEST) Pile Installation – Dive Works
Duration:	From 16/04/2024 To 17/04/2024

Services Provided:

A Steel Tubular pile will be installed from **Rebecca Lily** crane barge. After installation, a dive crew will excavate and cut the pile 300mm below the seabed level using underwater cutting equipment. Diving will employ SSBA and will be undertaken up to depths of 12m. The Dive work area is approximately 30-40m from shore and will be accessed from shore and the **Rebecca Lily**. In the instance support from a vessel is required, TDS will work with HBJV to utilise tender vessel **RIV-42** available on site. The works will be undertaken 7am-5pm.



The positioning of the **Riv 42** will allow the **Rebecca Lily** construction barge to continue with construction operations on Berth T3 East and relocate out of the Swing Basin as required for shipping movements.

Larger HBJV marine craft, including the Riv 42, are fitted with AIS and will maintain a listening watch on VHF 14 when operational.

Issued By	Harbour Master - Tasmania	Date of Issue	11/04/2024	Valid Until	17/04/2024	Page 1 of 2
------------------	---------------------------	----------------------	------------	--------------------	------------	--------------------

In event of emergency initial contacts are:

TasPorts Marine Emergency	VTS - VHF channel 16/ 14, or (03) 6380 3013
Contractor 1 st contact	Brock Males (TDS) – 0448 856 575
Contractor 2 nd contact	Tony Rudkin – 0414 339 348
Contractor 3 rd contact	Kyle Pursall – 0428 605 561

“Electronically signed”

Captain A. Michael Wall
Harbour Master – Tasmania